


X-band TTC Antennas

Our X-band TTC antennas are developed to give the customer reliable control and monitoring for all types of satellites.

We offer two main variants of X-band TTC Antennas:

- Helix Antennas
- Waveguide Pipe Antenna

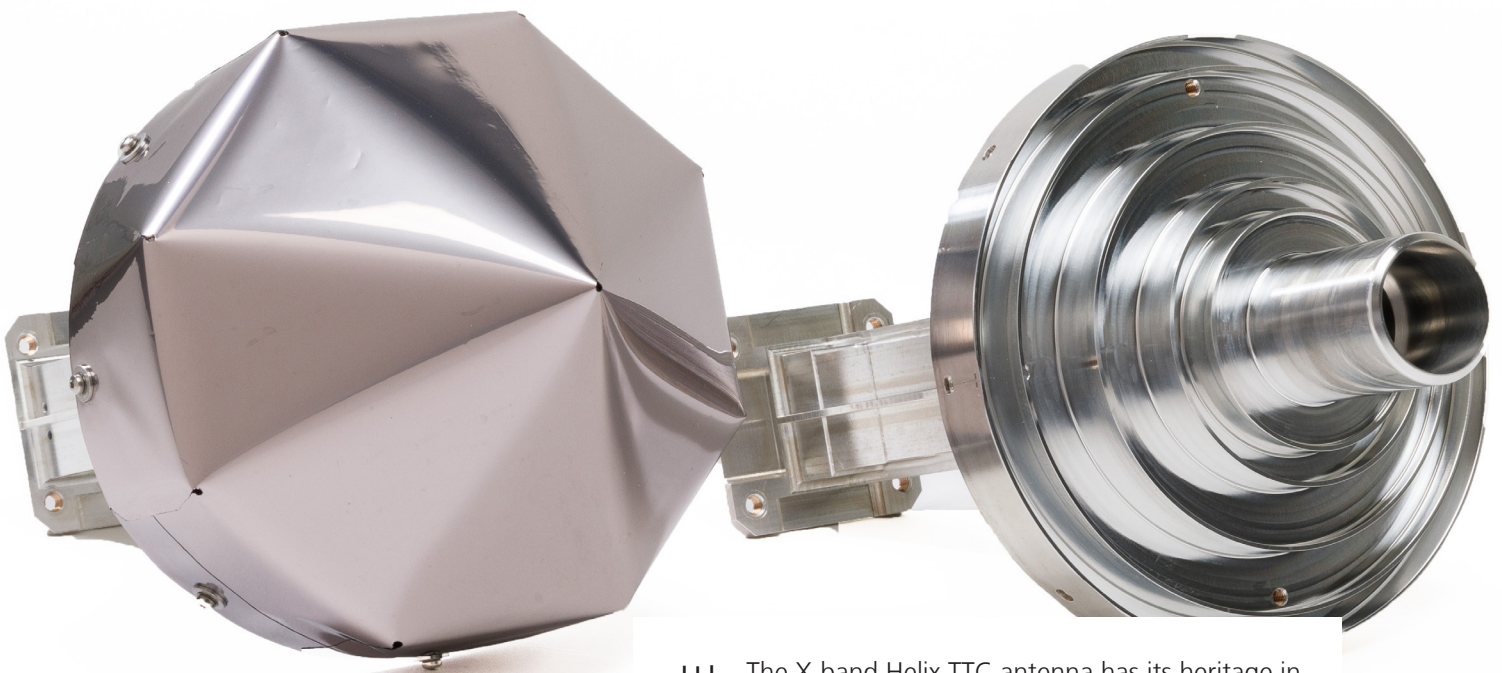

HERITAGE

The X-band Helix TTC antenna has its heritage in our data downlink antenna family that has become well renowned today. We have delivered more than fifty X-band Helix downlink antennas up to now.

This antenna type serves earth observation and scientific satellites in their crucial telemetry and command communication. The antennas have excellent performance combined with low volume and mass.

KEY FEATURES

- Dual frequency band antennas (RX/TC and TX/TM)
- Hemispherical coverage
- LHCP or RHCP variants are available
- Modular designs to keep qualification status
- Compact design, 105 to 140 mm diameter and 150 to 260 mm total height (helix variants)
- Compact design, 130 mm diameter and 215 mm total height (waveguide pipe variant)
- Low mass design, 310 to 400 g (helix variants)
- Low mass design, 300 g (waveguide pipe variant)
- Wide operational temperature range ± 150 °C

X-band Helix Antennas

TECHNICAL DATA


- EOC 90° (hemispherical coverage)
- Frequency band 7190 MHz to 7250 MHz (RX/TC) and 8025 MHz to 8400 MHz (TX/TM)

Coaxial I/F variant (SMA):





- Diameter 140 mm
- Total height <150 mm
- Mass <310 g

Waveguide I/F variant (WR112):

- Diameter 105 mm
- Total height <260 mm
- Mass <400 g

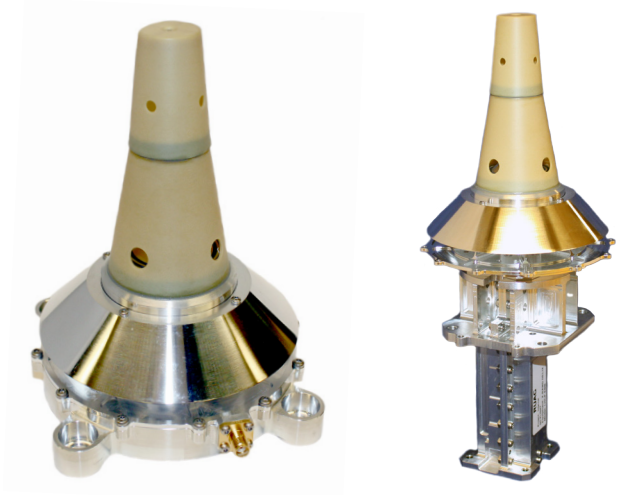

Typical measured antenna radiation patterns (min and max) are shown below:

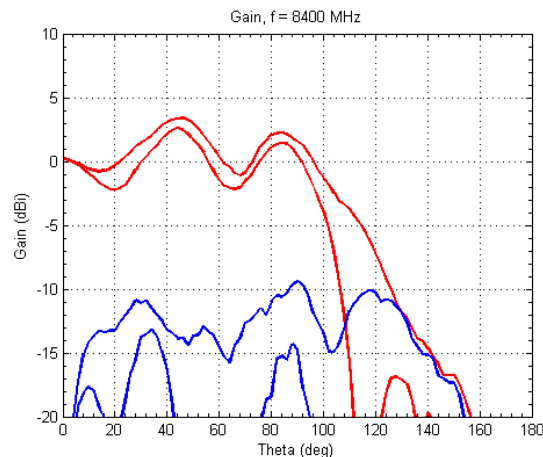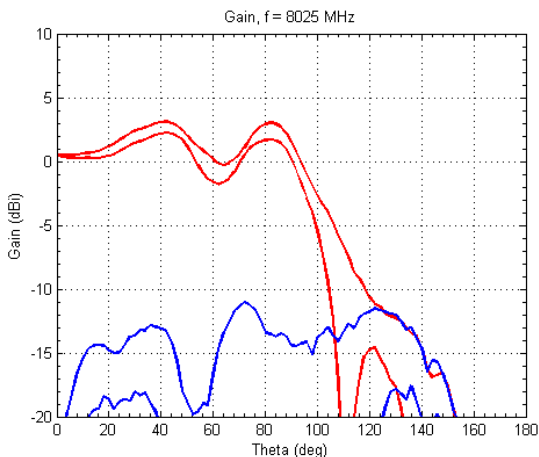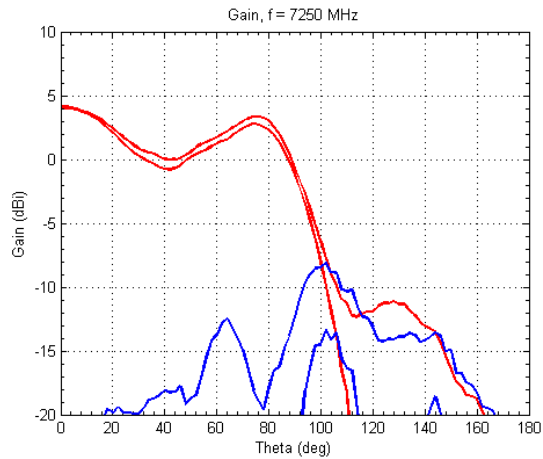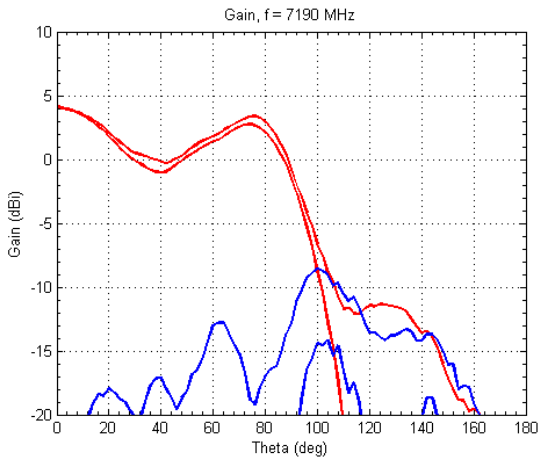

X-band Waveguide Pipe TTC Antennas




TECHNICAL DATA

- EOC 90° (hemispherical coverage)
- Frequency band 7145 MHz to 7250 MHz (RX/TX) and 8400 MHz to 8500 MHz (TX/TM)

Waveguide I/F variant (WR112):

- Diameter 130 mm
- Total height <215 mm
- Mass <300 g

Typical measured antenna radiation patterns (min and max) are shown below:

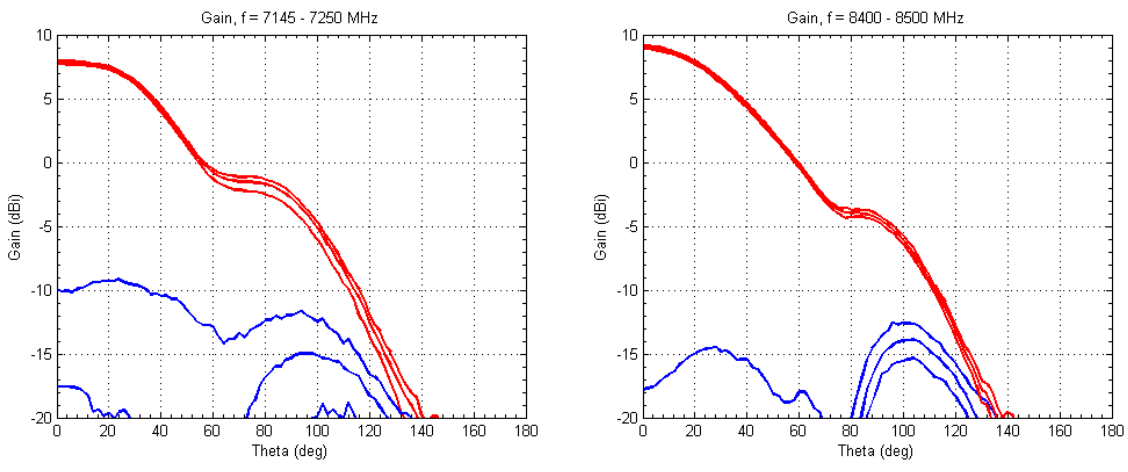

Auxiliary Items

- Test caps/hats are available to X-band TTC antennas. The test caps/hats are either absorptive with a set coupling value (e.g. 10, 15, 20 dB etc.) or with 0 dB coupling, depending power handling needs.
- A 3 dB S-Band hybrid with X-band filter function is available (to be used in a co-located X-Band down link and S- Band TTC system). It has > 25 dB suppression at X-band data downlink frequencies.

